

LED

Canopy FIXTURE



LED RAYS
MASTERING LIGHT

CCF Series


NEW

Features

- 35W Low Profile Canopy Fixture
- Indoor & outdoor IP67 rating
- High power CREE™ XM LED
- Digital Driver with 3 Way Protection
- Cast aluminum Housing Provides Exceptional Thermal Capability & Protection
- 65,000hrs L70 at 25°C Ambient



LONG LIFE
LED
TECHNOLOGY



WARRANTY FIVE YEAR


Product Specifications

Model	Power	LED Type	CCT	Efficacy	Luminous Flux	Beam Angle	IP Level	Input	Size
LR-CCF-35-55A	35W	XM CREE™	5500-6500K (4500K-5500K Option)	≥89lm/W	3100lm	140°Vx140°H	IP67	AC85-277V	252x252 x110mm
LR-CCF-35-55C	35W	XM CREE™	5500-6500K (4500K-5500K Option)	≥89m/W	3100lm	140°Vx140°H	IP67	AC180-528V	252x252 x110mm


Electrical Specifications

1. Power Input: AC85-277V
2. AC180-528V (Option)
3. Power Factor: ≥96
4. THD: ≤17% @ full Load
5. Dimming: Yes optional

Product Specifications



CREE XM™ HP LED



Exceptional Thermal Dissipation



Custom Cast Aluminum Housing for Solid Protection





Digital Driver with 3 way protection



Light Distribution

1.0m	1034.7 lux	2.2m
2.0m	258.7 lux	4.4m
3.0m	115.0 lux	6.6m
4.0m	64.7 lux	8.7m
5.0m	41.4 lux	10.9m
6.0m	28.7 lux	13.1m
7.0m	21.1 lux	15.3m

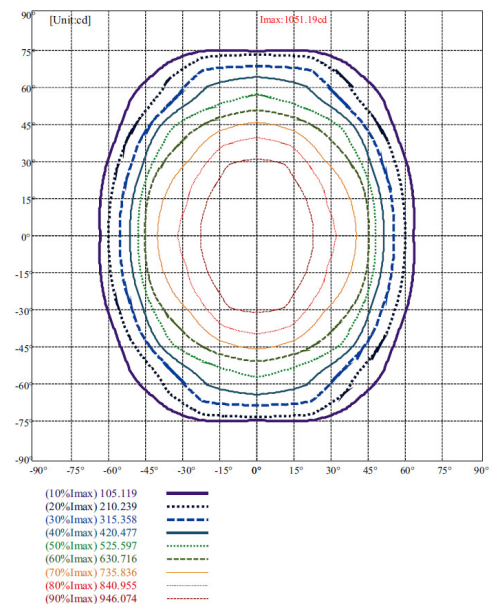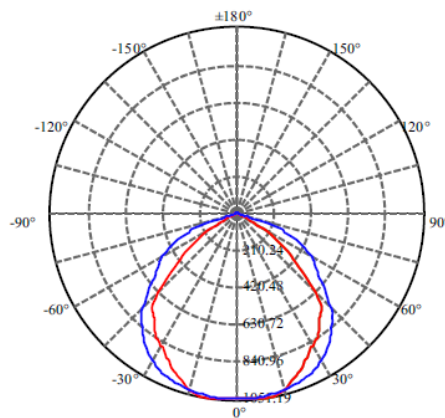

The specifications in this brochure are representative and must not be interpreted as a guarantee of individual product performance and/or characteristics.

LEDRAYS Inc. has a policy of continuous advancements & development specifications may change without notice. Please contact your rep for updates.