

LED

Canopy FIXTURE



LED RAYS
MASTERING LIGHT

CCF Series

UPDATED

Features

- 35W & 70w Low Profile Canopy Fixture
- Wide Distribution Optics for Exceptional Horizontal coverage
- Indoor & outdoor IP65 rating
- High power CREE™ COB LED
- Digital Driver with 3 Way Protection
- Cast aluminum Housing Provides Exceptional Thermal Capability & Protection
- 65,000hrs L70 at 25°C Ambient



Product Specifications

Model	Power	LED Type	CCT	Efficacy	Luminous Flux/Ra	Beam Angle	IP Level	Input	Size
LR-CCF-45-55A	45W	CREE™ COB	5500-6500K (4500K-5500K Option)	≥103lm/W	4635lm >85	160°Vx160°H	IP65	AC100-277V	243x243 x73mm
LR-CCF-70-55A	70W	CREE™ COB	5500-6500K (4500K-5500K Option)	≥100lm/W	7000lm >85	160°Vx160°H	IP65	AC100-277V	243x243 x73mm


Electrical Specifications

1. Power Input: AC100-277V
2. AC180-528V (Option)
3. Power Factor: ≥96
4. THD: ≤19% @ full Load
5. Dimming: Yes optional

Product Specifications



CREE™ COB LED

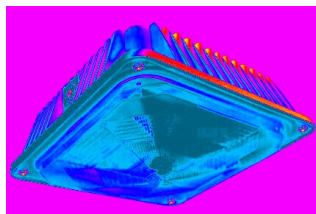


Exceptional Thermal Dissipation



Custom Cast Aluminum Housing







Digital Driver with 3 way protection

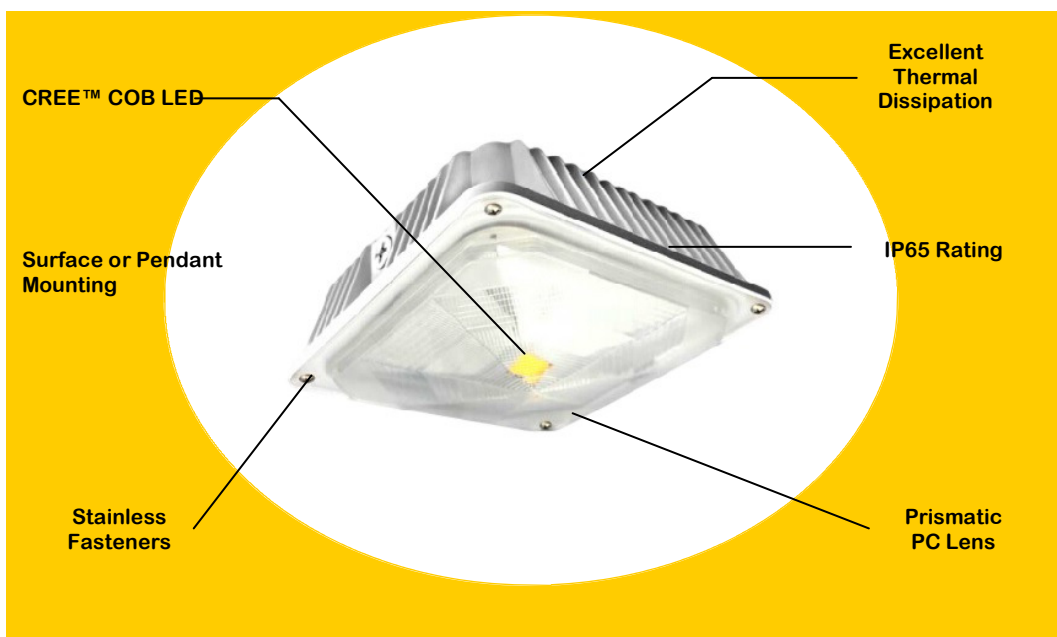

Light Distribution: LR-CCF-70-55A

Dimensions: mm

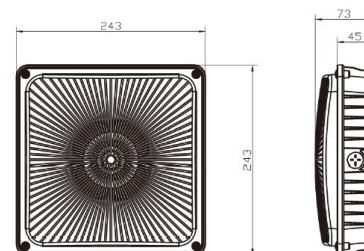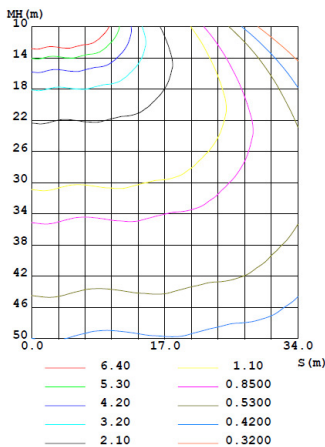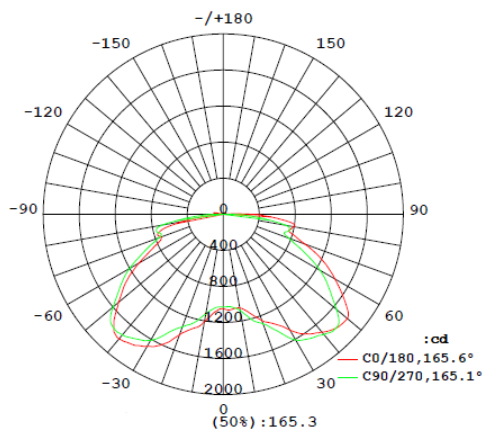

The specifications in this brochure are representative and must not be interpreted as a guarantee of individual product performance and/or characteristics. LEDRAYS Inc. has a policy of continuous advancements & development specifications may change without notice. Please contact your rep for updates.