

# LED

## Ruggedized Safety Luminaire

### SMD Platform



# LED RAYS

MASTERING LIGHT

## SLS Series

NEW

### Features

- Permanent or Temporary Configuration UL LED Fixture
- Efficacy >130lm/w
- IP66 Ingress Protection
- Low Power Samsung™ or Bridgelux™ LED Chips
- Impact Resistant Protective Cage
- 360 Deg Distribution
- -35°C/+45°C Operating Temperature Range
- Powder Coated Cast AL Driver Structure
- 65,000hrs L70 at 25°C Ambient



ULTRA HIGH EFFICACY



IP66



LONG LIFE



IQ LED



ENERGY SAVING


### Product Specifications

Model	Power	Operating Voltage	Mounting	CCT	Efficacy	Luminous Flux	CRI	Distribution	IP Level
LR-SLS-060-55-SUV1	60W	100-277VAC	Suspension	3500/4500/5500K	>130lm/W	>7800lm	70-80Ra	360°	IP66
LR-SLS-060-55-JBV1	60W	100-277VAC	J-Box	3500/4500/5500K	>130lm/W	>7800lm	70-80Ra	360°	IP66
LR-SLS-100-55-SUV1	100W	100-277VAC	Suspension	3500/4500/5500K	>120lm/W	>12500lm	70-80Ra	360°	IP66
LR-SLS-100J-55-JBV1	100W	100-277VAC	J-Box	3500/4500/5500K	>120lm/W	>12500lm	70-80Ra	360°	IP66

ORDERING CODE: LR-SLS-060- 55-- SU --- --

#### ELECTRICAL SPECIFICATIONS

1. Power Input: AC100-277V
2. AC180-508V (Option )
3. Power Factor: ≥93
4. THD: ≤18% @ full Load
5. Dimming: Yes, Optional
6. Presence Detection: Yes, Optional

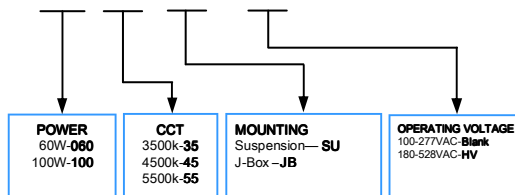


# LED RUGGEDIZED SAFETY LUMINAIRE

## Product Specifications



Low Power  
Samsung™ or Bridgelux™ Emitters



Exceptional Thermal  
Management



Safety Hook  
System



Polyester Coated  
Driver Housing




High Performance  
Sealed CC Driver

Powder Coated IP66 Structure

Up to 130lm/w

Protective Cage

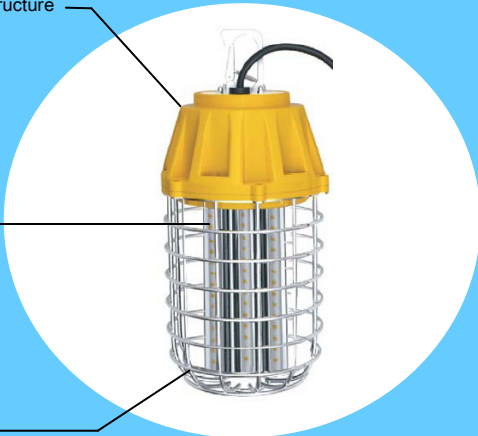


60W

Mounting Options


Digital Sealed Driver

360 deg. Distribution

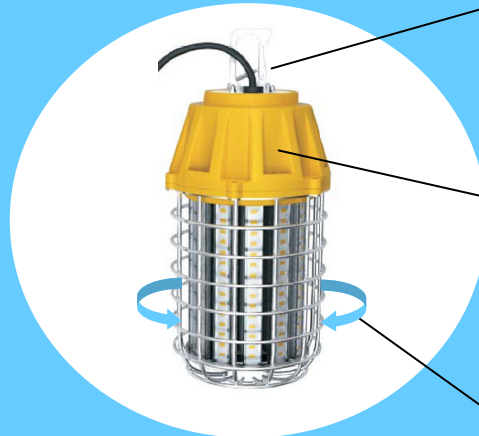

100W

## Dimensions

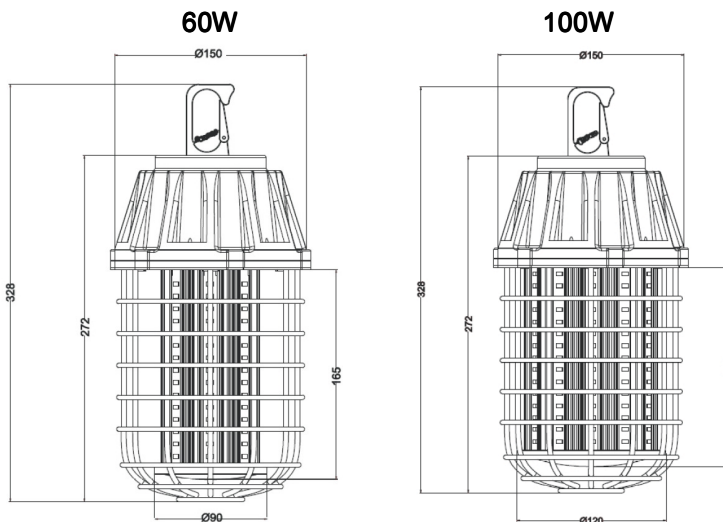

### WEIGHT



LR-SLS-60SUv1/2.2Kg/4.84lbs

LR-SLS-60JBv1/2.3Kg/5.06lbs

LR-SLS-100SUv1/2.8Kg/6.16lbs

LR-SLS-100JBv1/2.9Kg/6.38lbs

## Distribution

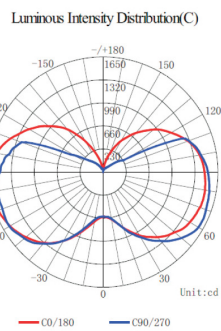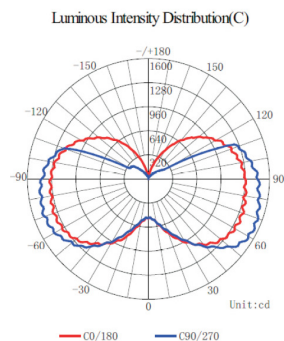

The specifications in this brochure are representative and must not be interpreted as a guarantee of individual product performance and/or characteristics. LEDRAYS Inc. has a policy of continuous advancements & development specifications may change without notice. Please contact your rep for updates.

LUMIAAGENCY

www.ledrays.com